

## RU-850LTB/5

Order No. 0259360

### UHF PLL pocket transmitter

- Suitable for combination with a headband microphone or an instrument microphone with 4-pole mini XLR connector
- Bandwidth: 36 MHz
- 6 groups, each with up to 22 compatible preset channels
- 1,441 selectable individual frequencies
- REMOSET ULTRASONIC technology for receiver/transmitter synchronisation
- Selectable sensitivity ( $\pm 15$  dB); additional 20 dB attenuation can be activated as required
- Lock/mute function
- 5-level display for indicating battery status and low battery alert, backlit LCD
- Switchable transmitting power

Model	RU-850LTB/5
Description	pocket transmitter
Carrier frequency range	506-542 MHz
Audio frequency range	50-16,000 Hz
Operating time	30 h
Transmitting power	10/50 mW
Power supply transmitter	2 x batt. AA size, alkaline (not supplied)
Dimensions transmitter	62 x 97 x 20 mm
Weight transmitter	76 g

**There are restrictions or requirements in the EU. Please read the notes regarding wireless systems in the section "IMPORTANT INFORMATION"!**



## CM-214ULF


Order No. 0236450

### Electret headband microphone

- Transparent sound
- Adjustable headband, comfortable to wear
- Highly resistant to acoustic feedback due to cardioid polar pattern
- Replaceable connection cable
- Flexible cartridge arm for exact positioning of cartridge, thus providing an optimum sound with an unobtrusive appearance
- Connection cable with strain relief, screwed-on
- Integr. drip ring protects the cartridge from moisture

Model	CM-214ULF
Polar pattern	cardioid
System	electret
Audio frequency range	100-18,000 Hz
Nominal impedance	1.5 k $\Omega$
Sensitivity	1.8 mV/Pa
Max. sound pressure	120 dB
Power supply	pocket transmitter IN/PT/UF series or PS-500
Weight	44 g

- Supplied with a 4-pole mini XLR connection cable for connection to pocket transmitters of the IN/PT/UF series
- Connection cable 801TG with right-angle 3.5 mm plug for use with our tour guide systems is available at option
- Supplied with bag and windshield

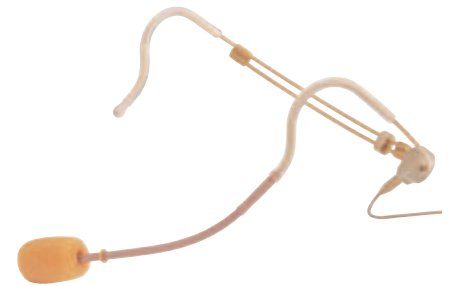

## CM-801F

Order No. 0235900

### Electret earband microphone

- Ultra-light earband microphone for stage and podium
- Optimum speech intelligibility
- Movable drip ring
- Screwed-on cable, easy to replace
- Clip for strain relief, makes microphone more comfortable to wear and enhances stable positioning
- Connection cable 801TG with right-angle 3.5 mm plug for use with our tour guide systems is available at option
- Supplied with bag and windshield

Model	CM-801F
Polar pattern	omnidir.
System	electret
Audio frequency range	60-15,000 Hz
Nominal impedance	1.8 k $\Omega$
Sensitivity	6.3 mV/Pa
Max. sound pressure	130 dB
Power supply	pocket transmitters of the IN/PT/UF series or PS-500
Weight	16 g



## 801C3

Order No. 0236120

### Connection cable

- Beige (801C3) or black (801C3/B) version
- 3-pole mini XLR connector
- Length: 150 cm
- Suitable for CM-801F, CM-804IF, CM-214F, CM-214ULF and CM-235IF, CM-235IB



## PT-RMS

Order No. 0236870

### External mute button (cough button)

- For tie clip microphones and headband microphones from JTS
- Selectable switching mode (ON/OFF, momentary ON, momentary OFF)
- 4-pole mini XLR connection
- Compatible with any pocket transmitter from JTS

