


NX-8S - Page: 1

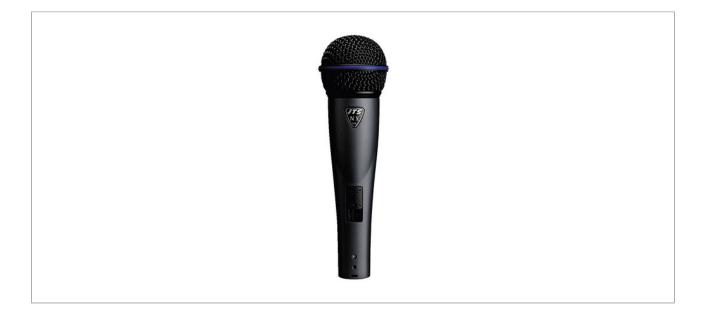

## NX-8S

Order No.: 0234780

## **PRODUCTINFOS**

## **Dynamic vocal microphone**

- Accentuated and clear voice reproduction
- Wide dynamic range

- Low-noise reed switch resistant to wear
- Significantly reduced transmission of the handling noise
- Non-slip and durable due to special stove-enamel finish
- High-quality and solid workmanship
- Supplied with microphone holder and padded bag

## **TECHNICAL SPECIFICATIONS**

NX-85	
Description	vocal microphone
Transmission method	cable
Polar pattern	cardioid
System	dynamic



NX-8S	
Audio frequency range	50-16,500 Hz
Nominal impedance	600 Ω
Sensitivity	2.5 mV/Pa
Max. sound pressure	138 dB
Housing material	diecast metal
Admiss. ambient temp.	0-40 °C
Weight	245 g
Connection	XLR, bal.
Packing dimensions (W $x$ H $x$ L)	0.13 x 0.08 x 0.26 m
Gross weight	0.635 kg
Net weight	0.42 kg